



PolyPro[®] XL Filter Cartridges

with APT[™] construction for extra long life



Polypropylene pleated graded-density filter cartridges featuring APT Construction for Extended Filter Lifetime


CUNO's PolyPro XL filter cartridge represents a major advance in pleated polypropylene filter design and performance. Advanced Pleat Technology (APT) construction combines:

- Up to 50% more filter media (surface area) than competitive filters
- Graded-density media for optimum contaminant holding
- New cartridge design for increased flow and reduced pressure drop

The result is a filter cartridge that lasts longer, performs better, and saves money.

PolyPro XL filters for food and beverage applications are available in the following versions :

- PEG version : without stainless steel insert
- PBG version : with stainless steel insert
- PTG version : with factory certified integrity testing
- PBP version : (multi-layers) for final filtration or for membrane protection

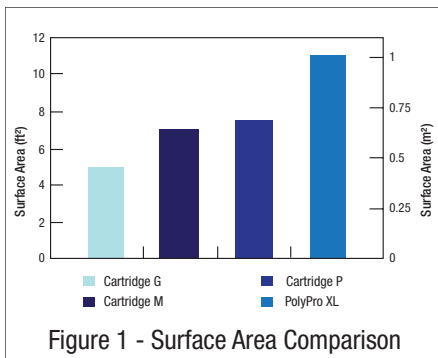

The APT Advantage

Surface area dictates just how long a filter will last and how it will perform. However, increasing surface area without considering the flow path between the media's pleats could result in flow restrictions and early media blinding. To achieve the optimum between surface area and performance, CUNO has designed PolyPro XL so that the pleating process and media support materials work together to provide enhanced flow characteristics and longer service life.

Features and benefits

Advanced Pleat Technology construction for extremely high surface area

- Higher product throughputs for extraordinarily long service life
- Lower total filtration operating costs
- Lower pressure drops for higher flow rates

Absolute-rated filter performance

- Consistent and reproducible contaminant removal
- Higher product quality and yields

Graded-density multi-layer filter media

- Selective entrapment of contaminant throughout the filter media to maximize filter life
- Higher contaminant holding capacity

Polypropylene cartridge components free of adhesives and surfactants

- Very low extractable levels for optimum filtrate purity
- Broad chemical compatibility for most aggressive process applications


100% integrity tested versions available

- Pre-qualification and assurance in critical applications
- Suitable for final filtration in many applications

Robust polypropylene cartridge construction

- Extends service life and compatible with a wide range of solvents and cleaning solutions



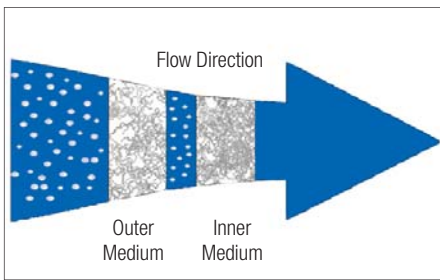

Graded-Density - the key to longer life

The PolyPro XL filter's graded-density media structure removes particles sequentially by size - the larger particles by the more open, outer medium and the smaller particles by the tighter, inner medium. The outer medium acts as a prefilter, while the inner provides the absolute removal specified by the cartridge rating. This construction effectively spreads the contaminant through the depth of the filter media resulting in extremely high contaminant capacity with lower pressure drop for longer service life.

Chemical Compatibility

Polypropylene construction provides chemical compatibility in many demanding process fluid applications. Compatibility is influenced by process operating conditions; in critical applications, cartridges should be tested under actual conditions to ensure correct selection.

Flow Characteristics and Sizing Options

Reduced cartridge change-out frequency

For a given process flow rate, the graded-density structure and maximum filter area decrease filter cartridge change-out frequency by 30 to 50 percent or more depending on the application.

Reduced filter housing costs

For new applications, the low pressure drops of the PolyPro XL filter allow smaller or fewer housings to be specified. Fewer filter cartridges and smaller housings provide lower capital and consumables costs, year after year.

Ideally, filter systems should be sized at an initial differential pressure of 0.5 to 1 psid (0.04 to 0.07 bar). Low flow rates further extend the life of the filter system. In most applications, doubling the filter area (reducing the flow rate per unit area by one-half) results in two and one-half times the throughput.


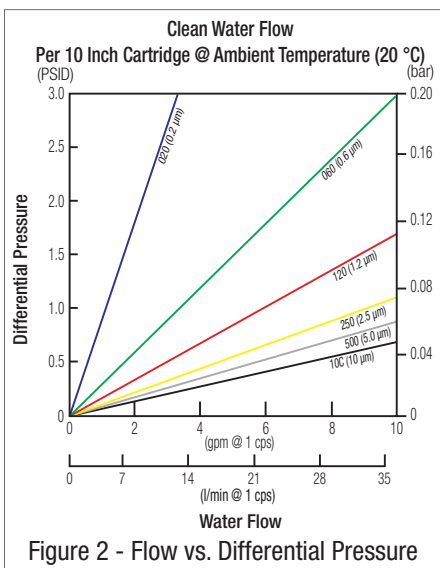



Figure 2 - Flow vs. Differential Pressure

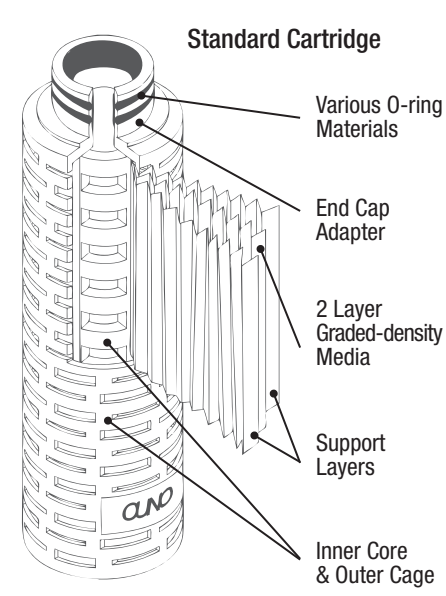

PolyPro XL Cartridge Specifications	
Materials	
Media	Graded-Density Pleated Polypropylene
Supports	Polypropylene
Core, Cage, End Caps	Polypropylene
Gasket and O-ring Options	Silicone, Fluorocarbon, Ethylene Propylene, Nitrile
Operating Conditions	
Maximum Operating Temperature	60 °C (130 °F) continuous 80 °C (175 °F) short term
Maximum Forward Pressure Differential	4 bar at 25 °C (60 psid at 77 °F)
Maximum Reverse Pressure Differential	4 bar at 25 °C (60 psid at 77 °F)
Cartridge Dimensions	
Media area versions	Grade 060, 100, 120, 250: 0.82 m ² (8.8 ft ²) Grade 020 : 0.75 m ² (8.1 ft ²) Grade 10C : 0.51 m ² (5.5 ft ²) Grade 500 : 0.80 m ² (8.6 ft ²)
Diameter	7 cm (2.75 inches)
Length	Nominal 10", 20", 30", and 40"

Quality System ISO 9001:2000

Polypro XL filter cartridges are manufactured under an ISO 9001:2000 certified quality system. The quality system ensure that appropriate standards are met or exceeded to provide consistent, high quality products.

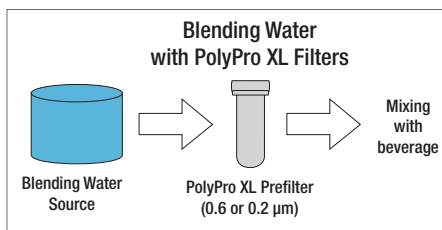

The PolyPro XL Filtration Advantage

Today's demanding beverage consumer insists on high quality, turbidity-free juices, teas, and fruit drinks. Blending water needs to be free of microscopic particulate that can cause haze and undesirable cloudiness in the final beverage. With 1m² of filtration area per cartridge, the PolyPro XL absolute rated filter provides substantially lower filtration costs as compared to competitive offerings.

PolyPro XL Filters - Engineered for Food & Beverage

PolyPro XL filter cartridges meet the requirements for today's food and beverage processing needs. All material used to construct the filter are FDA CFR Title 21 listed and are safe for food contact applications. The filter cartridge can be autoclaved, steamed-in-place (*in-situ*), and sanitized with hot water. The rugged polypropylene construction and extra large surface area provide excellent performance in all food and beverage filtration applications.

- **Backflushable** - PolyPro XL filter applications can be designed with a variety of methods to extend service life. Combined with hot water sanitation or other in-line cleaning procedures, backflushing PolyPro XL systems can extend service life significantly.

Protection of Final Membranes

Beverage bottlers frequently employ membrane cartridge filters, such as CUNO's BevASSURE filter, to achieve microstability without heat pasteurization. Typical retention ratings for the final filter are 0.45 μm or 0.65 μm. The PolyPro XL filter's absolute retention, graded-density structure, and extra large surface area are ideal for prefiltration protection of final sterilizing membranes. By removing contaminants before the final filter, the life of expensive membrane filter cartridges are extended significantly.

PolyPro XL cartridges can be used for finale filtration when a sterile membrane is not essential. A filtration with 0.2 or 0.6 μm PolyPro XL assure a greater protection.

Food & Beverage Applications

PolyPro XL filter cartridges are recommended for the broad range of prefiltration and clarification applications where reliability and economy are critical. Suggested applications include:

- Protection and Life Extention Of Expensive Membrane Final Filters
- Final Product Clarification
- Food Fermentation Feeds, Intermediates, and Fermentation Clarification
- Blending Water Filtration
- Cleaning Fluids
- Solvents Streams
- Air & Gas Prefiltration, and Final Filtration

Applications SUPPORT - SASS

CUNO's Scientific Applications Support Services (SASS) is staffed by scientists and engineers, with state-of-the-art laboratory facilities. The SASS staff, familiar with a wide range of filtration and separation applications, work closely with the customer to recommend the most effective and economical CUNO filtration systems.



PolyPro XL Filter Cartridge Ordering Guide

Model	Absolute Rating***	Configuration	Nominal Length	End Modification	Gasket/O-ring Material
PEG PBG PTG* PBP**	020* : 0.2 µm 060 : 0.6 µm 120 : 1.2 µm 250 : 2.5 µm 500 : 5.0 µm 10C : 10.0 µm	B = Cartridge 2.8" (7.1 cm)	01 : 10" 02 : 20" 03 : 30" 04 : 40"	B - 226 O-ring with spear C - 222 O-ring with spear D - DOE flat gasket (10") E - DOE flat gasket (9 3/4") F - 222 O-ring with Flat Cap	A - Silicone B - Fluorocarbon C - EPR D - Nitrile H - Clear silicone

* PTG020 not available with D & E end modifications.

** Available in 060 (0.6µm) and 120 (1.2µm) ratings only.

*** Retention ratings determined by modified ASTM STP 975. The 0.2 micron rating has been extrapolated. For more information, contact your CUNO representative.

Important Notice

CUNO MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Since a variety of factors can affect the use and performance of a CUNO product in a particular application, some of which are uniquely within the user's knowledge and control, user is responsible for determining whether or not the CUNO product is fit for a particular purpose and suitable for user's method of application.

Limitation of Remedies and Liability

If the CUNO product is proved to be defective, THE EXCLUSIVE REMEDY, AT CUNO'S OPTION, SHALL BE TO REFUND THE PURCHASE PRICE OR TO REPAIR OR REPLACE THE DEFECTIVE PRODUCT. CUNO shall not otherwise be liable for loss or damages, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including, but not limited to, contract, negligence, warranty or strict liability.

WARRANTY

Seller warrants its equipment against defects in workmanship and material for a period of 12 months from date of shipment from the factory under normal use and service and otherwise when such equipment is used in accordance with instructions furnished by Seller and for purposes disclosed in writing at the time of purchase, if any. Any unauthorized alteration or modification of the equipment by Buyer will void this warranty. Seller's liability under this warranty shall be limited to the replacement or repair, F.O.B. point of manufacture, of any defective equipment or part which, having been returned to the factory, transportation charges prepaid, has been inspected and determined by the Seller to be defective. THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EITHER EXPRESSED OR IMPLIED, AS TO DESCRIPTION, QUALITY, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR USE, OR ANY OTHER MATTER. Under no circumstances shall Seller be liable to Buyer or any third party for any loss of profits or other direct or indirect costs, expenses, losses or consequential damages arising out of or as a result of any defects in or failure of its products or any part or parts thereof or arising out of or as a result of parts or components incorporated in Seller's equipment but not supplied by the Seller.

CUNO, PolyPro and APT are registered trademarks of 3M Company used under license.



3M Europe NV/SA CUNO Filtration

Hermeslaan 7
1831 Diegem
Belgium
Phone: +32-2-7224500
Fax: +32-2-7224518
E-mail: infocuno-europe@mmm.com
Website address: www.3m.eu/filtration

For more contact addresses visit our website www.3m.eu/filtration
or www.cuno.com/international.

Data may be subject to change without further notice.

© 3M 2009. All rights reserved.

DOC01053
LITPXLLEB.EU - 0309